Circuit Diagrams for Washable Miniature Switches

CIRCUIT CODE	SWITCHING FUNCTION POS 1	POS 2	POS 3
	KEYWAY "Y" OPTION		
	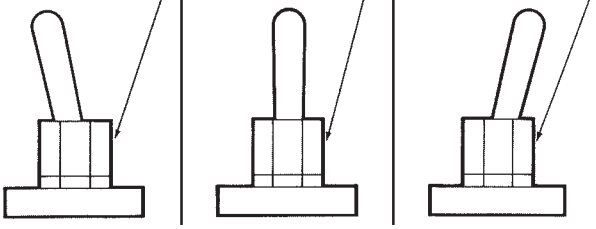		
	STAMPING THIS SIDE		
SINGLE POLE			
121	ON	OFF	ON
123	ON	NONE	ON
126	ON	NONE	MOM
127	MOM	OFF	MOM
131	ON	OFF	MOM
TERMINAL CONNECTIONS	2 - 3	OPEN	2 - 1
DOUBLE POLE			
221	ON	OFF	ON
223	ON	NONE	ON
226	ON	NONE	MOM
227	MOM	OFF	MOM
231	ON	OFF	MOM
TERMINAL CONNECTIONS	2 - 3 5 - 6	OPEN	2 - 1 5 - 4
SP3T			
232	ON	ON	ON
233	ON	ON	MOM
235	MOM	ON	MOM
TERMINAL CONNECTIONS	2 - 3 5 - 6	2 - 3 5 - 4	2 - 1 5 - 4

Schematics:

S.P.



D.P.

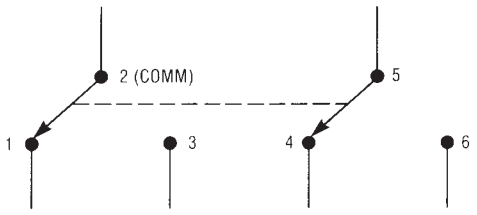



A TERMINALS



AV2 TERMINALS

Single Pole

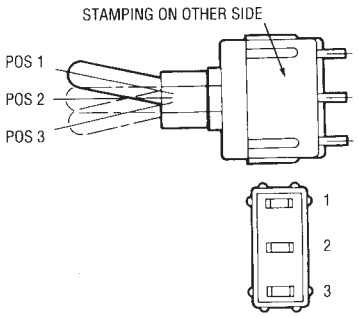

Double Pole

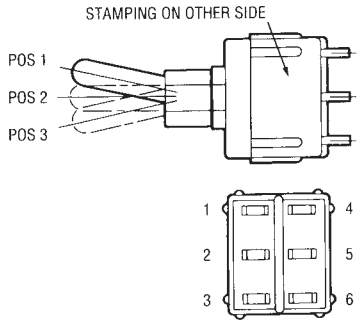
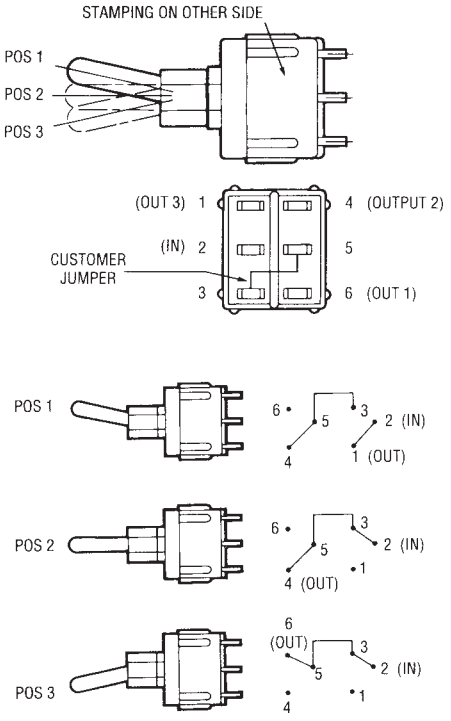
SP3T