
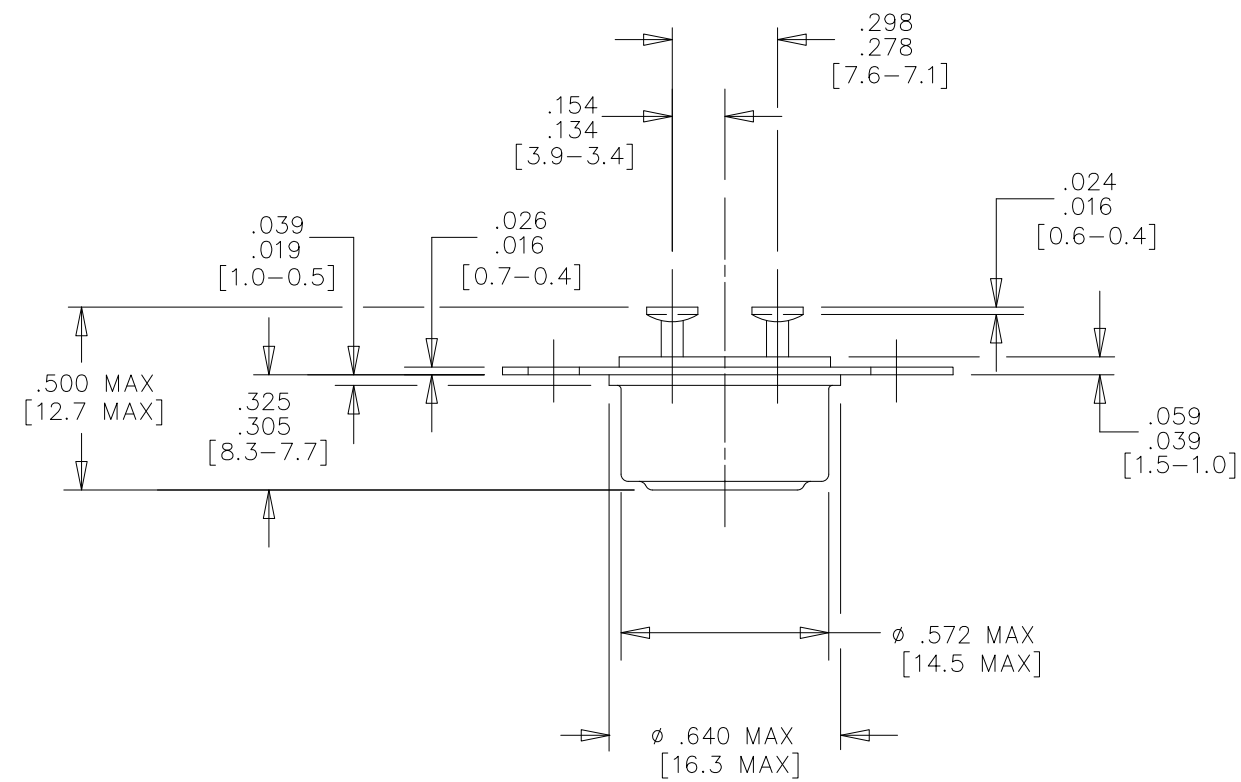


Property of
Sensata Technologies

ZONE	REV.	REVISION DESCRIPTION	ECN NO.	DATE
	D	RE-DOCUMENTED IN DWG. EDITOR, ADDED (mm) DIMENSIONS , REMOVED NOTE "THIS THERMOSTAT HAS PASSED APPLICABLE PARTS OF MILITARY ENVIRONMENTAL SPECIFICATIONS MIL-E-5272 & MIL-T-5574": D.P.	ECO-075424	17-APR-2012

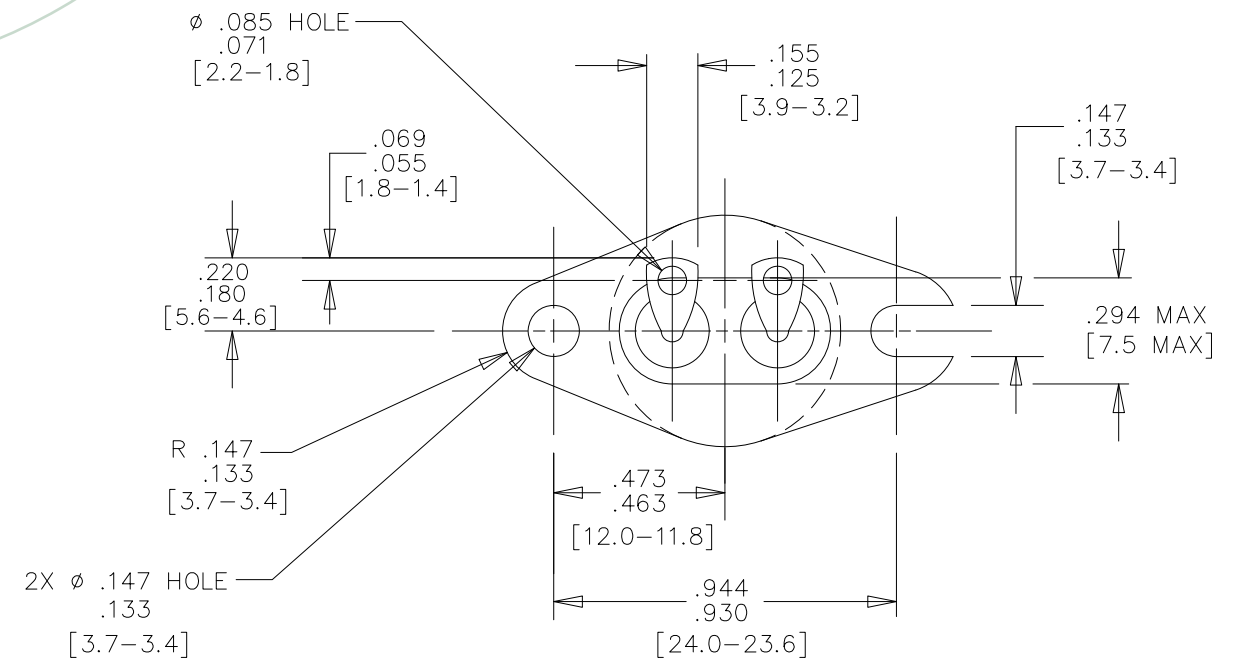

[] BRACKET DENOTES METRIC


PART NO.: ----- 11041-14-*

OPERATING TEMPERATURE:
OPEN: ----- °F. ± °F.
CLOSE: ----- °F. ± °F.

FINISH: -----

WEIGHT: ----- 5.9 GRAMS MAX.

AMBIENT TEMPERATURE EXPOSURE RANGE: ----- -65°F. TO +450°F [-53.9° TO 232.2°C].



ELECTRICAL RATING RESISTIVE

30 VAC/DC	125 VAC	250 VAC	LIFE CYCLES
AMPERES			
5.0	2.0	1.0	100,000
5.5	3.0	1.5	50,000
6.0	4.0	2.0	25,000
6.5	5.0	2.5	10,000
7.0	6.0	3.0	5,000

DIELECTRIC STRENGTH
TERMINAL TO CASE: ----- 1250 VOLTS, RMS, 60 CYCLES FOR 1 MINUTE

NOTE: *
FOR ORDERING PRODUCTION QUANTITIES TWO DASH NUMBERS ARE NECESSARY, THE SECOND DASH NO. WILL BE ASSIGNED WHEN OPERATING CHARACTERISTICS AND DESIGN DETAILS ARE ESTABLISHED.

FOR REFERENCE ONLY, CHECK LATEST REVISION BEFORE USE.
PARTS MADE TO THIS PRINT MUST CONFORM TO E9898 REV. E

DRAWN
J.D. MAYALL
DATE 25-FEB-1963

ENGINEER
S.B. MARQUIS
DATE 12-APR-1996

APPROVED

DATE

SENSATA TECHNOLOGIES PROPRIETARY AND CONFIDENTIAL. NEITHER THIS PRINT NOR THE INFORMATION CONTAINED HEREON IS TO BE USED AGAINST THE INTERESTS OF SENSATA TECHNOLOGIES OR AGAINST THE INTERESTS OF ANY OF ITS AFFILIATED COMPANIES OR WHOLLY OWNED SUBSIDIARIES.

INTERPRET DIMENSIONING AND TOLERANCING PER ASME Y14.5-2009. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
TOLERANCES
DECIMALS ANGLES

DO NOT SCALE DRAWING
THIRD ANGLE PROJECTION



529 PLEASANT STREET
P.O. BOX 2964
ATTLEBORO, MA 02703

TITLE
11041-14
THERMOSTAT
SPST AUTO.RESET SEALED
ENVELOPE DRAWING

SIZE DWG NO. REV.
B 11041-14 D

SCALE 1:1 AUTOCAD SHEET 1 OF 1

DEVICE: PROJECT: 256A