

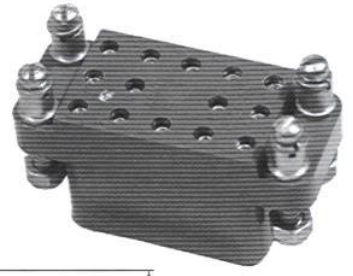
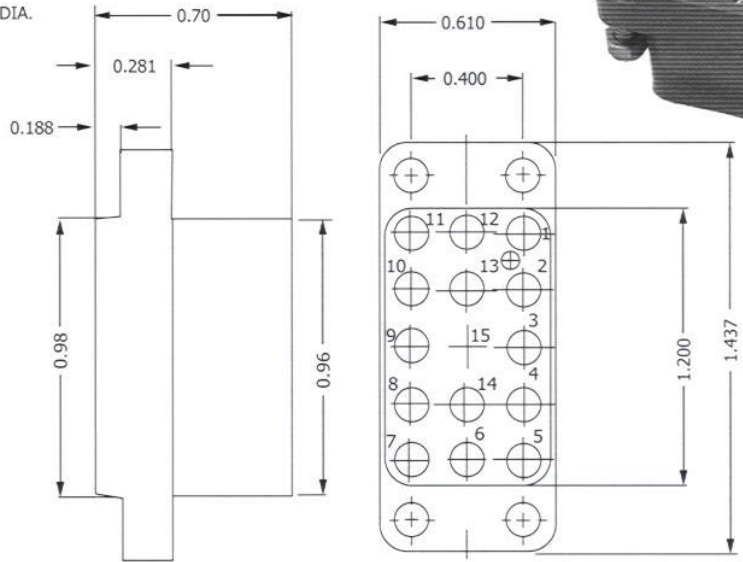


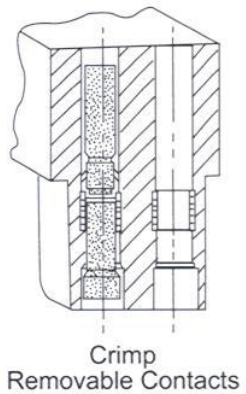

HRCC-CK SERIES

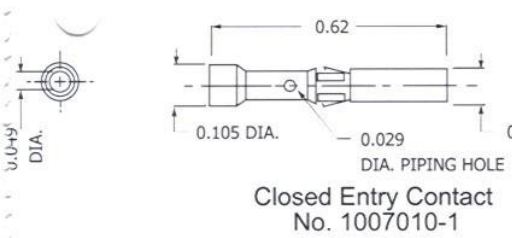

SPECIFICATIONS

ELECTRICAL

- Current Rating 3 Amperes
- Contact Size 0.030 Inch
- Withstanding Voltage
 - Contact to Contact Sea Level 2700 VRMS Minimum
 - Contact to Ground Sea Level 1500 VRMS Minimum
 - Contact to Contact 70,000 Ft.560 VRMS Minimum
 - Contact to Ground 70,000 Ft.375 VRMS Minimum

MECHANICAL

- Creepage Between Contacts012 Min.
- Air Space Between Contacts009 Min.
- Terminal Accommodation One No. 20, One No. 22,
One or Two No. 24 AWG Wire
- Contact Material & Plating Phosphor Bronze, Gold Plated
(Sleeve-Brass) (0.000050 inch) per MIL-G-45204,
Type II, Class 1, Over Copper Plate
- Contact Retaining Clip Stainless Steel, Passivated
- Crimping Tool No. MS 3191A
- Positioner No. KP7010
- Insertion Tool Not Required

- Mounting Hardware:
Special Studs, Screws Lockwashers and Nuts
- Insulation Material:
Choice of "MIL Approved" Thermosetting
Insulations (See Page 45)

Temperature Ratings: -65°C to +125°C
Weight of Socket with Mountings: 0.75 oz.

