


**KLIXON** 

MADE IN U.S.A.

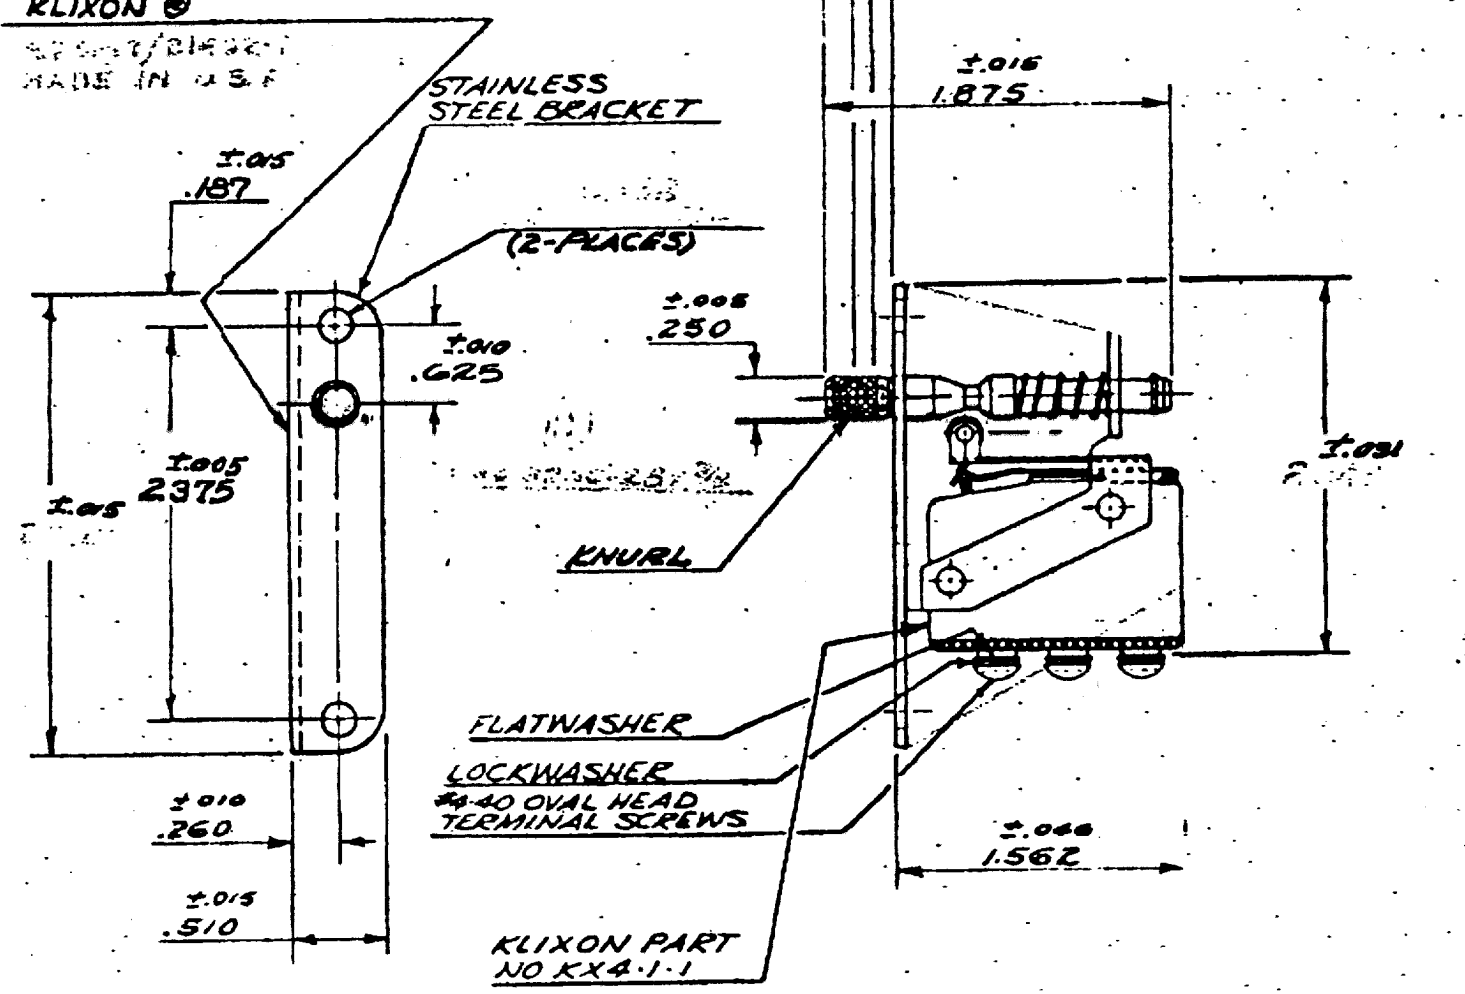

A	2.375 ± .005 WAS 2.175 ± .005, 6253.010 WAS 437 ± .010 ADDED RE-38 NC-28 TND	10-26-61	RP/WM
B	2.750 ± .015 WAS 2.567 ± .015, 2.249 ± .011 WAS 2.067 ± .011, 2.117 ± .011 WAS 2.044 ± .011	10-26-61	RP/WM
C	WAS #6-38 NC-28 TND	1-25-62	RP/WM
D	ADDED CUST. NO. TO STAMP NOTE	12-26-62	RP/CWB
E	ADDED CURRENT RATING	8-31-64	MACWR
F	SEE C.N. CR46164	10-13-71	EW/HB
G	CODE WAS METAL STAMP CR57776	5-20-75	CP
H	OVERTRAVEL FORCE WAS 3.105, CR 57776	6-30-75	CP
J	ADDED -1 TO DWG NO. (R) 283556	11-30-82	LK
K	SEE DCN CR154570	0.2. 1-9-90	CF
L	.375 DIM WAS MAX ECN 12887 PAF	11-5-03	JAF

**CHARACTERISTICS**

- OVERTRAVEL FORCE ----- 5 LBS. MAX. (H)
- DIELECTRIC STRENGTH ----- 1250 V.R.M.S.
- AMBIENT TEMPERATURE RANGE - -65°F TO +160°F
- RATED LOAD ----- 10 AMPS AT 115 VAC P.F. 0.9-1.0
- 10 AMPS AT 28 VDC RESISTIVE
- LIFE AT RATED LOAD ----- 25,000 CYCLES

(E)

	28 V.D.C.	115 VAC 400 CYCLES
RES.	10	10
IND	5	5
LAMP	3	3

UNLESS OTHERWISE SPECIFIED		
DIMENSIONS ARE IN INCHES		
TOLERANCES ON FRACTIONS		
DECIMALS	ANGLES	
±.03		
BY	R.S. MULHERN	DATE
		9-11-61
APP.	T.P. STAPLETON	DATE
		9-11-61

PART NO. 214624  
 SWITCH, PUSH-PULL, S.P.D.T  
 DOOR INTERLOCK  
 ENVELOPE DRAWING

SCALE: FULL

**TEXAS INSTRUMENTS**  
 INCORPORATED  
 METALS & CONTROLS DIVISION  
 ATTLERDPO, MASSACHUSETTS, U.S.A.

SPENCER **KLIXON** PRODUCTS

QTY. 1  
 DATE

**21462**

B CODE 32647

Property of Sensing Technologies