


# Klixon® AT Two-Pole, Three-Pole, and Four-Pole Package Designs

- Available in a wide variety of packaging styles
- Packaging options are available for one, two, or multiple poles
- Custom packaging is available to suit your needs, whatever they may be

Listed below is information about a popular device in this category.

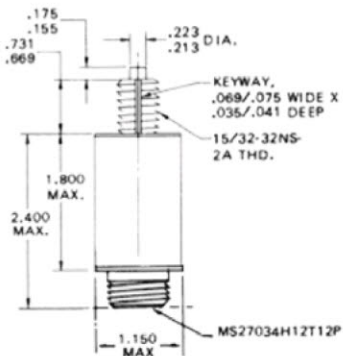

Part Numbers	Typical Actuation Characteristics			<i>Klixon can provide connectors to meet any customer application need. Contact Sensata Technologies for details to customize a switch.</i>
<b>AT409</b> <b>10AT375</b> <b>AT408</b> <b>10AT374</b>	<b>Typical Actuation Characteristics</b>	<b>AT</b>	<b>10AT</b>	
	Maximum Actuating Force (STP)	10 lb.	10 lb.	
Pictured:	Minimum Release Force (STP)	1 lb.	1 lb.	
<b>AT410-1</b> <b>10AT383-1</b> <b>10AT453-1</b>	Button Seal / MIL-PLF-8805	Yes	Yes	
	Maximum Pretravel	.030 inch	.030 inch	
	Maximum Movement Differential	.020 inch	.020 inch	
	Minimum Overtravel	.200 inch	.125 inch	
	Positive Overtravel Stop	Yes	Yes	
	Maximum Force on Actuator	30 lb.	30 lb.	