



# **OME**

## **INTERCONNECT**



**PRODUCT CATALOG**

**GLOBAL LEADER IN AEROSPACE CONNECTIVITY**

**CONTACT: MARCUS WARREN-PRESIDENT**  
**DME INTERCONNECT**  
**(316) 529-2441**  
Email: [customerservice@dmeinterconnect.com](mailto:customerservice@dmeinterconnect.com)



# CAPABILITY STATEMENT

## PAST PERFORMANCE

Since 1990 DME has supplied parts to the largest worldwide aviation, military, space and MRO companies. Due to the confidentiality of some of these contracts references will be available upon request.

## APPLICABLE CODES

NAICS Codes: 334417, 335129, 335999

## CERTIFICATIONS

ISO: ISO 9001:2015

AS: AS9100D

## DME INTERCONNECT

170 CAIN DRIVE  
HAYSVILLE, KANSAS 67060  
[WWW.DMEINTERCONNECT.COM](http://WWW.DMEINTERCONNECT.COM)

## COMPANY OVERVIEW

DME INTERCONNECT is a leader in aerospace-military and space electrical connectors and components located in Haysville, Kansas. Our mission is to drive short lead times, quality and economics to become the standard in the aerospace industry. Over the years we have made great strides in implementing this standard with our Smart-Tooling system that eliminates unnecessary steps in the manufacturing process.

Our current productions capability is 15,000-20,000 parts per month.

## Manufacturing Services

Immediate delivery of custom M18714 electronic splices in small or large quantities in 2-4 weeks.

DME Interconnect offers immediate communication with our engineering staff to assist customers in their exact choice of passive electronics, for each connector needed to solve a customer's design application. Drawings and samples are provided for each part.

## Services Provided

DME Interconnect manufacturers MIL-T-81714 wire splices and modules with or without electrical components. DME supplies vacuum baked parts that meet ASTM E-595 space requirements. Capabilities include:

- Silicone injection molding
- Engineered Plastics injection molding
- Tooling design
- PAD printing part marking
- DOD package and alternate release shipping for military
- Quick-disconnect connectors
- Rough environment connectors
- Wire harnesses



Built and qualified to MIL-T-81714E, DME wire splices provide a reliable positive and maintainable connection for two and four wire applications. All use the standard M39029/1 pin contact. The new D environmental class splice supersedes part numbers of the preceding A, B, and C environmental classes thus eliminating the cumbersome multiple environmental class system.

### PERFORMANCE SPECIFICATIONS

**DIELECTRIC WITHSTANDING VOLTAGE:**

Sea Level: 1,500 Volts AC (RMS)  
 At 70,000 ft: 200 Volts AC (RMS)

**INSULATION RESISTANCE**

5,000 megohms at 25 C.

**TEMPERATURE:**

Operative at -65 C to +200 C.

**FLUID COMPATABILITY:**

Method 1016 of MIL-STD-1344.

**CURRENT RATING:**

Contact size 22-5 amps, size 20-7.5 amps.  
 size 16-13 amps, size 12-23 amps.

**MOISTURE RESISTANCE:**

Method 1002, Type II of MIL-STD-1344.

**THERMAL SHOCK**

Per MIL-STD-1344 Test Condition A.

\*QPL Authorization NAC 29.15/04-12-96.

**CONTACT RETENTION:**

Contact Size	Axial Load
22	12 lbs. min
20	20 lbs. min
16	25 lbs. min
12	30 lbs. min

**GROMMET SEALING RANGE:**

(MIL-T-81714, Table I)

Contact size	Max. Wire O.D.	Min. Wire O.D.
22	.060	.030
20	.083	.040
16	.109	.065
12	.142	.097


**OTHER TESTS PERFORMED:**

Vibration, Mechanical Shock, Altitude Immersion, Temperature Life, all per MIL-T-81714E.




## MIL-T-81714E SERIES I SPLICES

### IN-LINE JUNCTIONS

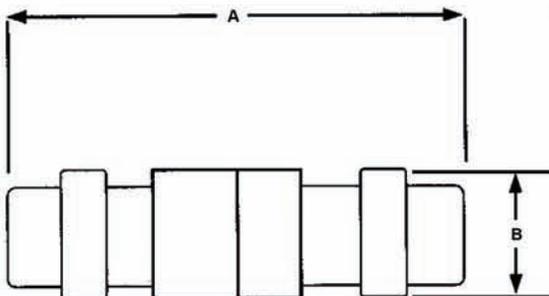

MILITARY PART NUMBER	CONTACT SIZE	A MAX.	B MAX.
M81714/11-22D	22	1.310	.250
M81714/11-20D	20	1.434	.250
M81714/11-16D	16	1.452	.281
M81714/11-12D	12	1.922	.369


Grommet Color: Blue

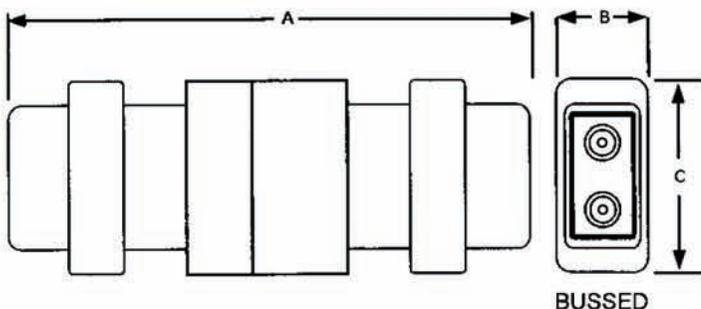

MILITARY PART NUMBER	CONTACT SIZE	A MAX.	B MAX.	C MAX.
M81714/12-22D-1	22	1.322	.275	.400
M81714/12-20D-1	20	1.428	.275	.400
M81714/12-16D-1	16	1.428	.300	.500

Grommet Color: Blue

### CONTACTS

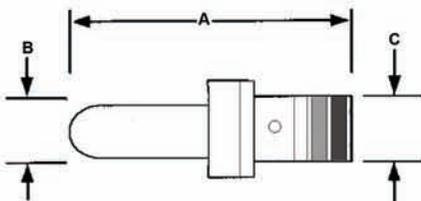

CONTACT SIZE	WIRE GAUGE	MILITARY CONTACT P/N	A MAX.	B MAX.	C MAX.
22	22-26	M39029/1-100	.418	.063	.051
20	20-24	M39029/1-101	.418	.063	.078
16	16-20	M39029/1-102	.501	.078	.105
12	12-16	M39029/1-103	.501	.095	.153

### ASSEMBLY TOOLS

CONTACT SIZE	MILITARY CONTACT P/N	CRIMP TOOL	CRIMP TOOL POSITIONER	INSERTION/EXTRACTION TOOL	SEALING PLUGS
22	M39029/1-100	M22520/2-01	M22520/2-11	M81969/14-02	MS27488
20	M39029/1-101	M22520/1-01	M22520/1-02 Red	M81969/14-02	MS27488
		M22520/2-01	M22520/2-11		
16	M39029/1-102	M22520/1-01	M22520/1-02 Blue	M81969/14-03	MS27488
12	M39029/1-103	M22520/1/01	M22520/1-02 Yellow	M81969/14-04	MS27488



DME In-Line Junctions provide environment resistant performance in either two wire or bussed four wire configurations. Both types use standard MIL-39029/22 socket contacts. All DME Series In-Line Junctions are qualified to MIL-T-81714E (Series II)\* and are completely interchangeable with the Deutsch CTL/ CTM In-Line Junctions.

## PERFORMANCE SPECIFICATIONS

### DIELECTRIC WITHSTANDING VOLTAGE:

Sea Level: 1,500 Volts AC (RMS)  
At 70,000 ft: 200 Volts AC (RMS)

### INSULATION RESISTANCE

5,000 megohms at 25 C.

### TEMPERATURE:

Operative at -65 C to +200 C.

### FLUID COMPATABILITY:

Method 1016 of MIL-STD-1344.

### CURRENT RATING:

Contact size 22-5 amps, size 20-7.5 amps.  
size 16-13 amps, size 12-23 amps.

### MOISTURE RESISTANCE:

Method 1002, Type II of MIL-STD-1344.

### THERMAL SHOCK

Per MIL-STD-1344 Test Condition A.

### CONTACT RETENTION:

Contact Size	Axial Load
22	12 lbs. min
20	20 lbs. min
16	25 lbs. min
12	30 lbs. min

### GROMMET SEALING RANGE: (MIL-T-81714, Table I)

Contact size	Max. Wire O.D.	Min. Wire O.D.
22	.060	.030
20	.083	.040
16	.109	.065
12	.142	.097

### OTHER TESTS PERFORMED:


Vibration, Mechanical Shock, Altitude Immersion, Temperature Life, all per MIL-T-81714E.

\*QPL Authorization NAC 29.15/12-06-95.




## MIL-T-81714E SERIES II SPLICES

### IN-LINE JUNCTIONS

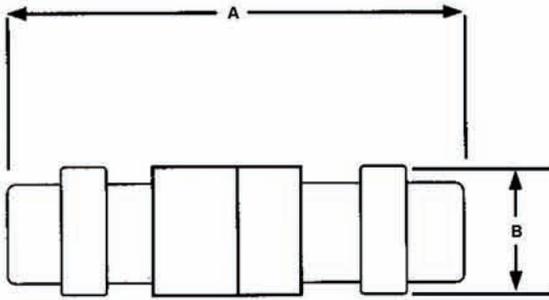


DME PART NUMBER	MILITARY PART NUMBER	CONTACT SIZE	A MAX.	B MAX.
DME-22	M81714/65-22-1	22	1.310	.230
DME-20	M81714/65-20-1	20	1.434	.290
DME-16	M81714/65-16-1	16	1.452	.324
DME-12	M81714/65-12-1	12	1.710	.387

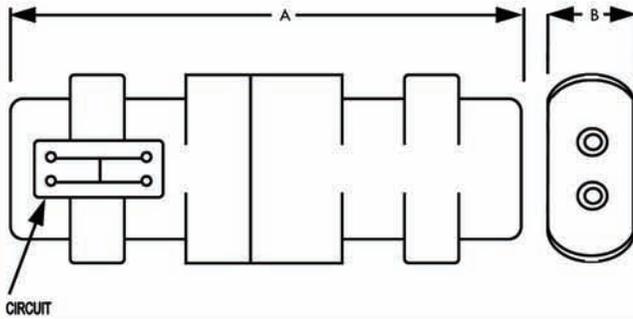

DME PART NUMBER	MILITARY PART NUMBER	CONTACT SIZE	A MAX.	B MAX.	C MAX.
DME-22B	M81714/65-22-2	22	1.322	.240	.384
DME-20B	M81714/65-20-2	20	1.428	.271	.481
DME-16B	M81714/65-16-2	16	1.428	.304	.548
DME-12B	M81714/65-12-2	12	1.704	.367	.674

### SOCKET CONTACTS

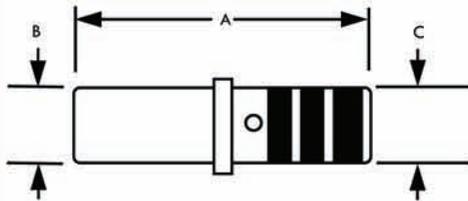

CONTACT SIZE	WIRE GAUGE	MILITARY CONTACT P/N	A MAX	B MAX	C MAX
22	22-26	M39029/22-191	.327	.052	.060
20	20-24	M39029/22-192	.358	.076	.070
16	16-20	M39029/22-193	.358	.092	.103
12	12&14	M39029/22-605	.455	.163	.154

### ASSEMBLY TOOLS

CONTACT SIZE	MILITARY CONTACT P/N	CRIMP TOOL	CRIMP TOOL POSITIONER	INSERTION/EXTRACTION	SEALING PLUGS	WIRE STRIP LENGTH
22	M39029/22-191	M22520/7-01	M22520/7-11	81515-23	MS27488-22	.207 ±.030
20	M39029/22-192	M22520/7-01	M22520/7-12	M83723/31-20 M81969/14-11	M83723/28-20	.207 ±.030
16	M39029/22-193	M22520/7-01	M22520/7-13	M83723/31-16 M81969/14-03	M83723/28-16	.207 ±.030
12	M39029/22-605	M22520/1-01	M22520/1-16	M83723/31-12 M81969/14-04	M83723/28-12	.225 ±.020



## Electronic Component Splices Series I



Qualified to MIL-T-81714 DME's M81714/21 Diode Junctions and M81714/23 Fuse Junctions are compact, economical, and readily available with short lead times. Custom configurations of these Electronic Junctions packaging other types of electronic components are also available in non-qualified versions terminating with the same Series I pin contacts.

### PERFORMANCE SPECIFICATIONS

**DIELECTRIC WITHSTANDING VOLTAGE:**

Sea Level: 1,500 Volts AC (RMS)  
At 70,000 ft: 200 Volts AC (RMS)

**INSULATION RESISTANCE**

5,000 megohms at 25 C.

**TEMPERATURE:**

Operative at -65 C to +200 C.

**FLUID COMPATABILITY:**

Method 1016 of MIL-STD-1344.

**MOISTURE RESISTANCE:**

Method 1002, Type II of MIL-STD-1344.

**THERMAL SHOCK**

Per MIL-STD-1344 Test Condition A.

**CONTACT RETENTION:**

Contact Size	Axial Load
20	20 lbs. min
22	12 lbs. min

**GROMMET SEALING RANGE:**

(MIL-T-81714, Table I)

Contact size	Max. Wire O.D.	Min. Wire O.D.
20	.083	.040
22	.060	.030

**OTHER TESTS PERFORMED:**

Vibration, Mechanical Shock, Altitude Immersion, Temperature Life, all per MIL-T-81714.


[WWW.DMEINTERCONNECT.COM](http://WWW.DMEINTERCONNECT.COM)

170 Cain Drive, Haysville, Kansas 67060 | FAX: 316.529.2541 | PHONE: 316.529.2441



## Electronic Component Splices Series I

MB1714, Series I, Electronic In-Line Junction  
Integral Diode

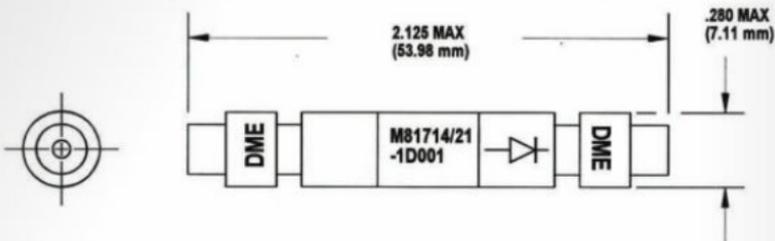


### Style 1 Part Numbers.

Part Number	Diode P/N	Size	Contact P/N
M81714/21-1D001	JAN 1N5618	22	M39029/1-100
M81714/21-1D002	JAN 1N5618	20	M39029/1-101
M81714/21-1D003	JAN 1N4148	20	M39029/1-101
M81714/21-1D004	JAN 1N5620	20	M39029/1-101

### Part Number Explanation:

M 81714/21 - 1 D XXX

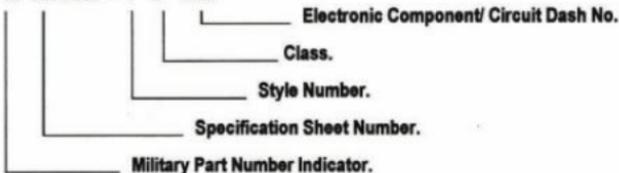


### Part Number Example:

M81714/21-1D001

Diode in-line junction, Size 22, Style 1, Class D, with 001 circuit (one JAN 1N5618 diode).

[WWW.DMEINTERCONNECT.COM](http://WWW.DMEINTERCONNECT.COM)

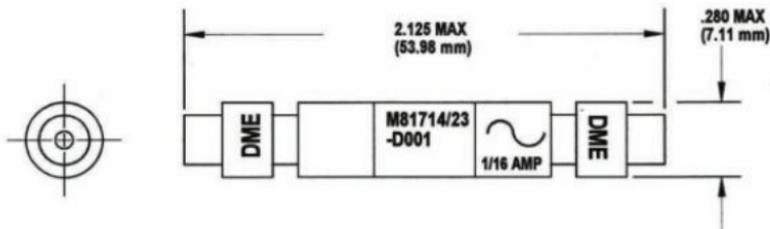**DME**  
INTERCONNECT**Electronic Component Splices**  
**Series I****M81714, Series I, Electronic In-Line Junction**  
**Integral Fuse****Style 1 Part Numbers.**

Style 1 fuses meet the requirements of MIL-F-23419, Type FM04.

Part Number	Fuse Rating		Size	Contact P/N
	Amps	Volts		
M81714/23-1D001	1/16	125	20	M39029/1-101
M81714/23-1D002	1/8	125	20	M39029/1-101
M81714/23-1D003	1/4	125	20	M39029/1-101
M81714/23-1D004	3/8	125	20	M39029/1-101
M81714/23-1D005	1/2	125	20	M39029/1-101
M81714/23-1D006	3/4	125	20	M39029/1-101
M81714/23-1D007	1	125	20	M39029/1-101
M81714/23-1D008	1-1/2	125	20	M39029/1-101
M81714/23-1D009	2	125	20	M39029/1-101
M81714/23-1D010	2-1/2	125	20	M39029/1-101
M81714/23-1D011	3	125	20	M39029/1-101
M81714/23-1D012	3-1/2	125	20	M39029/1-101
M81714/23-1D013	4	125	20	M39029/1-101
M81714/23-1D014	5	125	20	M39029/1-101
M81714/23-1D015	7	125	20	M39029/1-101
M81714/23-1D016	10	125	20	M39029/1-101

Above PIN's also available in size 22 with the M39029/1-100 contact. Please consult factory.

[WWW.DMEINTERCONNECT.COM](http://WWW.DMEINTERCONNECT.COM)



## Electronic Component Splices Series II



Identical in performance to our qualified M81714/21 and M81714/23 Electronic Junctions DME's Series II Electronic Junctions provide users the same application options as the Series I Electronic Junctions only terminating with Series II socket contacts. Whether in a standard configuration or a customer specified configuration packaging other types of electronic components the DME Series II Electronic Junction is compact, economical, and readily available with short lead times.

### PERFORMANCE SPECIFICATIONS

**DIELECTRIC WITHSTANDING VOLTAGE:**

Sea Level: 1,500 Volts AC (RMS)  
At 70,000 ft: 200 Volts AC (RMS)

**INSULATION RESISTANCE**

5,000 megohms at 25 C.

**TEMPERATURE:**

Operative at -65 C to +200 C.

**FLUID COMPATABILITY:**

Method 1016 of MIL-STD-1344.

**MOISTURE RESISTANCE:**

Method 1002, Type II of MIL-STD-1344.

**THERMAL SHOCK**

Per MIL-STD-1344 Test Condition A.

**CONTACT RETENTION:**

Contact Size	Axial Load
20	20 lbs. min
22	12 lbs. min

**GROMMET SEALING RANGE:**

(MIL-T-81714, Table I)

Contact size	Max. Wire O.D.	Min. Wire O.D.
20	.083	.040
22	.060	.030

**OTHER TESTS PERFORMED:**

Vibration, Mechanical Shock, Altitude Immersion, Temperature Life, all per MIL-T-81714.

[WWW.DMEINTERCONNECT.COM](http://WWW.DMEINTERCONNECT.COM)


170 Cain Drive, Haysville, Kansas 67060 | FAX: 316.529.2541 | PHONE: 316.529.2441

## Electronic Component Splices

### Electronic In-Line Junctions

#### Integral Diode

Terminating with the MB1714, Series II Socket Contact

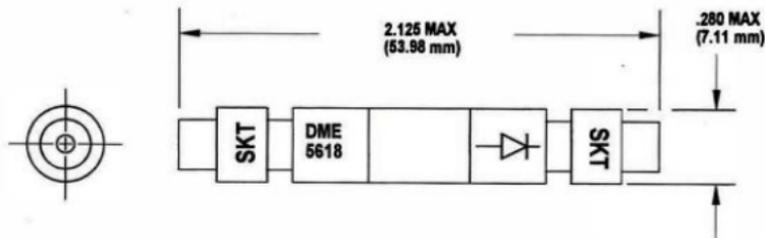


#### DME PART NUMBERS.

Part Number	Diode P/N	Size	Contact P/N
DME-5618	JAN 1N5618	20	M39029/22-192
DME-4148	JAN 1N4148	20	M39029/22-192
DME-5620	JAN 1N5620	20	M39029/22-192
DME-4006	1N4006	20	M39029/22-192



## Electronic Component Splices

Electronic In-Line Junctions  
Integral Fuse  
Terminating with the M81714, Series II Socket Contact

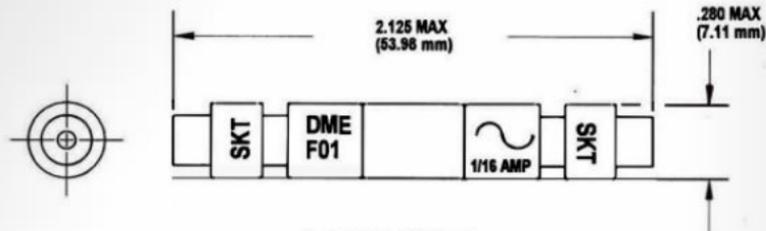

### DME PART NUMBERS.


Fuses meet the requirements of MIL-F-23419, Type FM04.

Part Number	Fuse Rating		Size	Contact P/N
	Amps	Volts		
DME-F01	1/16	125	20	M39029/22-192
DME-F02	1/8	125	20	M39029/22-192
DME-F03	1/4	125	20	M39029/22-192
DME-F04	3/8	125	20	M39029/22-192
DME-F05	1/2	125	20	M39029/22-192
DME-F06	3/4	125	20	M39029/22-192
DME-F07	1	125	20	M39029/22-192
DME-F08	1-1/2	125	20	M39029/22-192
DME-F09	2	125	20	M39029/22-192
DME-F10	2-1/2	125	20	M39029/22-192
DME-F11	3	125	20	M39029/22-192
DME-F12	3-1/2	125	20	M39029/22-192
DME-F13	4	125	20	M39029/22-192
DME-F14	5	125	20	M39029/22-192
DME-F15	7	125	20	M39029/22-192
DME-F16	10	125	20	M39029/22-192


WWW.DMEINTERCONNECT.COM

170 Cain Drive, Haysville, Kansas 67060 | FAX: 316.529.2541 | PHONE: 316.529.2441

DME ELECTRONIC COMPONENT SPLICE

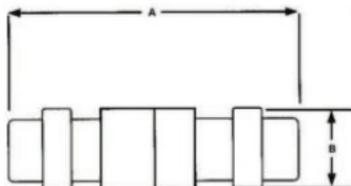**JIFFY JUNCTIONS**

**PART NUMBER CROSS REFERENCE**

DME Part Number	Deutsch Part Number	+ A -.060	+ B -.030
DSE-22-01	TSE-22-01	1.250	.200
DSE-20-01	TSE-20-01	1.370	.250
DSE-16-01	TSE-16-01	1.370	.275
DSE-12-01	TSE-12-01	1.650	.380



**CONTACTS  
AND  
ASSEMBLY TOOLING**


DME Part Number	DEUTSCH Part Number	CONTACT Size	+ A-.010	+ B-.010	C Min.	Wire Range	Sealing Min. O.D.	Range Max. O.D.	Insert to Contact Tool Number	Crimp Tool
1841-22	100060-56	22	.058	.320	.145	26 24 22	.033	.054	M15570 -22-1	MH800- K 127 Daniels
1841-20	1841-1-5620	20	.101	.281	.165	24 22 20	.040	.083	M15570 -20	M22520/ 2-01
1841-16	1841-1-5616	16	.131	.381	.250	20 18 16	.068	.103	M15570 -16	M22520/ 1-01
1841-12	1841-1-5612	12	.188	.418	.252	14 12	.106	.158	M15570 -12	15500 -12-7

\* Reduced Crimp Barrel Contacts Available Upon Request



## MIL-T-81714, Series 1 Electronic Terminal Blocks Feedback Type, Size 20-2

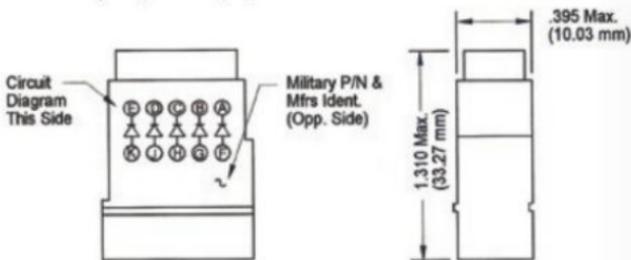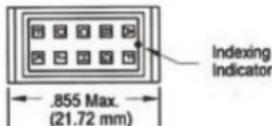

### MIL-T-81714

#### SIZE 20-2 ELECTRONIC TERMINAL BLOCK PART NUMBERS.

Military P/N	DME P/N	Diode P/N	Quantity	Size	Contact P/N
M81714/26-D-001	DME26-D001	JAN TX1N5618	5	20	M39029/1-101
M81714/26-D-002	DME26-D002	JAN TX1N5552	5	20	M39029/1-101

The above Electronic Terminal Blocks are also available in size 22 as well as with other electronic components (Resistors, Fuses, etc.). Please consult factory.

[WWW.DMEINTERCONNECT.COM](http://WWW.DMEINTERCONNECT.COM)



DME TERMINAL BLOCKS



## Terminal Modules

BUSSING CONFIGURATION	FEEDBACK			CONTACT	
	MILITARY PART NO.	SAE PART NO.	DME PART NO.	SIZE	P/N M39029
	MB1714/2-DA1	AS81714/2-DA1	DME/2-DA1	/20	1-101
	MB1714/2-DB1	AS81714/2-DB1	DME/2-DB1	/20	1-101
	MB1714/2-DB2	AS81714/2-DB2	DME/2-DB2	/20	1-101
	MB1714/2-DB3	AS81714/2-DB3	DME/2-DB3	/20	1-101
	MB1714/2-DC1	AS81714/2-DC1	DME/2-DC1	/20	1-101
	MB1714/2-DC2	AS81714/2-DC2	DME/2-DC2	/20	1-101
	MB1714/2-DC3	AS81714/2-DC3	DME/2-DC3	/20	1-101
	MB1714/2-DC4	AS81714/2-DC4	DME/2-DC4	/20	1-101
	MB1714/2-DD1	AS81714/2-DD1	DME/2-DD1	/20	1-101
	MB1714/2-DD2	AS81714/2-DD2	DME/2-DD2	/20	1-101
	MB1714/2-DE1	AS81714/2-DE1	DME/2-DE1	/20	1-101
	MB1714/1-DA1	AS81714/1-DA1	DME/2-DA1	/22	1-100
	MB1714/1-DB1	AS81714/1-DB1	DME/2-DA1	/22	1-100
	MB1714/1-DB2	AS81714/1-DB2	DME/2-DA1	/22	1-100
	MB1714/1-DB3	AS81714/1-DB3	DME/2-DA1	/22	1-100
	MB1714/1-DC1	AS81714/1-DC1	DME/2-DA1	/22	1-100
	MB1714/1-DC2	AS81714/1-DC2	DME/2-DA1	/22	1-100
	MB1714/1-DC3	AS81714/1-DC3	DME/2-DA1	/22	1-100
	MB1714/1-DC4	AS81714/1-DC4	DME/2-DA1	/22	1-100
	MB1714/1-DD1	AS81714/1-DD1	DME/2-DA1	/22	1-100
	MB1714/1-DD2	AS81714/1-DD2	DME/2-DA1	/22	1-100
	MB1714/1-DE1	AS81714/1-DE1	DME/2-DA1	/22	1-100
	MB1714/3-DA1	M81714/3-DA1	DME/3-DA1	/16	1-102
	MB1714/3-DB1	M81714/3-DB1	DME/3-DB1	/16	1-102
	MB1714/3-DB2	M81714/3-DB2	DME/3-DB2	/16	1-102
	MB1714/3-DC1	M81714/3-DC1	DME/3-DC1	/16	1-102
	MB1714/3-DC2	M81714/3-DC2	DME/3-DC2	/16	1-102
	MB1714/3-DD1	M81714/3-DD1	DME/3-DD1	/16	1-102

MIL-T-81714 SERIES I  
 TERMINAL JUNCTION BLOCKS  
 BUSSING MODULES, FEEDBACK TYPE  
 SIZE 20 AND 22.



PART NUMBERS

BUSSING	MILITARY P/N		CONTACT P/N	
	Size 20	Size 22	Size 20	Size 22
	M81714/2-DA1	M81714/1-DA1	M39029/1-101	M39029/1-100
	M81714/2-DB1	M81714/1-DB1	M39029/1-101	M39029/1-100
	M81714/2-DB2	M81714/1-DB2	M39029/1-101	M39029/1-100
	M81714/2-DB3	M81714/1-DB3	M39029/1-101	M39029/1-100
	M81714/2-DC1	M81714/1-DC1	M39029/1-101	M39029/1-100
	M81714/2-DC2	M81714/1-DC2	M39029/1-101	M39029/1-100
	M81714/2-DC3	M81714/1-DC3	M39029/1-101	M39029/1-100
	M81714/2-DC4	M81714/1-DC4	M39029/1-101	M39029/1-100
	M81714/2-DD1	M81714/1-DD1	M39029/1-101	M39029/1-100
	M81714/2-DD2	M81714/1-DD2	M39029/1-101	M39029/1-100
	M81714/2-DE1	M81714/1-DE1	M39029/1-101	M39029/1-100





**DME**  
INTERCONNECT

**DME INTERCONNECT**  
170 CAIN DRIVE HAYSVILLE, KANSAS 67060

WWW.DMEINTERCONNECT.COM  
316-529-2441

CAGE Code: 0A744

QPL: QPL-AS81714

Manufacturer Designation	Government Designation
180-16B	M81714/12-16D-1
180-20B	M81714/12-20D-1
180-22B	M81714/12-22D-1
190-16	M81714/11-16D
190-20	M81714/11-20D
190-22	M81714/11-22D
DME-12	M81714/65-12-1
DME-12B	M81714/65-12-2
DME-16	M81714/65-16-1
DME-16B	M81714/65-16-2
DME-20	M81714/65-20-1
DME-20B	M81714/65-20-2
DME-21001	M81714/21-1D001
DME-21002	M81714/21-1D002
DME-21003	M81714/21-1D003
DME-21004	M81714/21-1D004
DME-22	M81714/65-22-1
DME-22B	M81714/65-22-2
DME-23001	M81714/23-1D001
DME-23002	M81714/23-1D002
DME-23003	M81714/23-1D003
DME-23004	M81714/23-1D004
DME-23005	M81714/23-1D005
DME-23006	M81714/23-1D006
DME-23007	M81714/23-1D007
DME-23008	M81714/23-1D008
DME-23009	M81714/23-1D009
DME-23010	M81714/23-1D010
DME-23011	M81714/23-1D011
DME-23012	M81714/23-1D012



**DME**  
**INTERCONNECT**

**DME INTERCONNECT**  
170 CAIN DRIVE HAYSVILLE, KANSAS 67060

WWW.DMEINTERCONNECT.COM  
316-529-2441

QPL: QPL-AS81714

CAGE Code: 0A744

<b>Manufacturer Designation</b>	<b>Government Designation</b>
DME-23013	M81714/23-1D013
DME-23014	M81714/23-1D014
DME-23015	M81714/23-1D015
DME-23016	M81714/23-1D016
DME/1-DA1	M81714/1-DA1
DME/1-DB1	M81714/1-DB1
DME/1-DB2	M81714/1-DB2
DME/1-DB3	M81714/1-DB3
DME/1-DC1	M81714/1-DC1
DME/1-DC2	M81714/1-DC2
DME/1-DC3	M81714/1-DC3
DME/1-DC4	M81714/1-DC4
DME/1-DD1	M81714/1-DD1
DME/1-DD2	M81714/1-DD2
DME/1-DE1	M81714/1-DE1
DME/2-DA1	M81714/2-DA1
DME/2-DB1	M81714/2-DB1
DME/2-DB2	M81714/2-DB2
DME/2-DB3	M81714/2-DB3
DME/2-DC1	M81714/2-DC1
DME/2-DC2	M81714/2-DC2
DME/2-DC3	M81714/2-DC3
DME/2-DC4	M81714/2-DC4
DME/2-DD1	M81714/2-DD1
DME/2-DD2	M81714/2-DD2
DME/2-DE1	M81714/2-DE1
DME/3-DA1	M81714/3-DA1
DME/3-DB1	M81714/3-DB1
DME/3-DB2	M81714/3-DB2
DME/3-DC1	M81714/3-DC1
DME/3-DC2	M81714/3-DC2
DME/3-DD1	M81714/3-DD1
DME24-1D001	M81714/24-1D001



**DME**  
INTERCONNECT

## DME INTERCONNECT

170 CAIN DRIVE HAYSVILLE, KANSAS 67060

WWW.DMEINTERCONNECT.COM

316-529-2441

QPL: QPL-AS81714

CAGE Code: 0A744

Manufacturer Designation	Government Designation
DME24-1D002	M81714/24-1D002
DME24-2D001	M81714/24-2D001
DME24-2D002	M81714/24-2D002
DME26-D001	M81714/26-D-001
DME26-D002	M81714/26-D-002



# **DME**

## **INTERCONNECT**

### **ENGINEERING THE FUTURE**

DME INTERCONNECT prides ourselves on innovation of electronic connectivity for aerospace, military, space and automotive.

### **OUR QUALITY PROMISE**

NAICS CODES: 334417, 335129, 335999

CAGE CODE: 0A744

ISO 9001:2015

AS9100D

PHONE: 316-529-2441

EMAIL: [CUSTOMERSERVICE@DMEINTERCONNECT.COM](mailto:CUSTOMERSERVICE@DMEINTERCONNECT.COM)

WEB: [WWW.DMEINTERCONNECT.COM](http://WWW.DMEINTERCONNECT.COM)

**GLOBAL LEADER IN AEROSPACE CONNECTIVITY**