ECONOSWITCH - ENVIRONMENTALLY SEALED SWITCHES Series - 8536, 8537, 8538

Econoswitch Sealed Leverlock Toggle Switches

FEATURES

- Environmentally sealed
- 1, 2 and 4 pole circuitry
- Locking actuator for safety
- One hole mounting for easy installation
- Over 25 standard locking configurations
- 2 & 3 position with maintained and momentary action
- Multi-circuits
- Three types of termination offered as standard
- Also available with toggle and Designerline Actuator. For details see page A11 for toggles and page A17 for Designerline.

SPECIFICATIONS Watertight seal per MIL-STD-108E and designed to meet IP68

- UL recognized and CSA certified
- Temperature range: -50°F to +150°F (-46°C to + 66°C)
- Life: 50,000 operations at rated load 100,000 operations mechanical life
- Bushing: 15/32" 32 thread

	CURRENT RATINGS													
		Catalog Number	Type of Operation	28VDC			115VAC 60 or 400Hz							
)				Lamp Load	Resistive Load	Inductive Load	Lamp Load	Resistive Load	Inductive Load					
1	1	8536	Maintained	5	20	15	3	15	10					
			Momentary	4	15	10	2	11	7					
	2	8537	Maintained	7	20	15	4	15	15					
			Momentary	5	18	10	2	11	8					
	4	8538	Maintained	5	20	12	4	15	15					
			Momentary	4	18	10	2	11	8					

For the UL/CSA ratings, see page A70.

EVER LOCK SELECTION	TABLE						
		CIRCUIT	WITH LEVER IN		CAT	ALOG NUMBE	R
	Up Position	Center Position	Down Position (Keyway)	Screw Terminals	Solder Lug Terminals	Spade Terminals	Available Locking Configurations
		ONE POLE					
	ON ON ON ON	OFF NONE NONE OFF	ON OFF ON NONE	8536K1 △ K9 △ K4 △ K6 △	8536K91 △ K99 △ K94 △ K96 △	8536K31 △ K39 △ K34 △ K36 △	ALL D, F, G D, F, G E, F, K, M
8536	ON *ON NONE ON OFF	NONE OFF OFF NONE NONE	ON* ON* ON* OFF* ON*	8536K5 △ K2 △ K7 △ K10 △ K11 △	8536K95 △ K92 △ K97 △ K910 △ K911 △	8536K35 △ K32 △ K37 △ K310 △ K311 △	E, L, N E F
60 00	ON *ON ON	OFF ON ON	ON* NONE NONE	8536K3 △ K12△ K13△	8536K93 △ K912△ K913△	8536K33 △ K312 △ K313 △	E, F, K, L, M, N E E, F, K, M
400		TWO POLE					
(6)	ON ON ON	OFF NONE NONE	ON OFF ON	8537K1 △ K9 △ K4 △ K6 △	8537K91 △ K99 △ K94 △	8537K31 △ K39 △ K34 △ K36 △	ALL D, F, G D, F, G E, F, K, M
8537	ON ON *ON NONE ON OFF	OFF NONE OFF OFF NONE NONE	NONE ON* ON* ON* OFF* ON*	8537K5 △ K2 △ K7 △ K10 △ K11 △	K96 △ 8537K95 △ K92 △ K97 △ K910△ K911 △	8537K35 △ K32 △ K37 △ K310 △ K311 △	F E, L, N E F
3	ON *ON ON	OFF ON ON ON	ON* NONE NONE ON	8537K3 △ K12△ K13△ 8537K14△	8537K93 △ K912△ K913△ 8537K914△	8537K33 △ K312△ K313 △ 8537K314 △	E, F, K, L, M, N E E, F, K, M ALL
000	ON *ON *ON	ON ON ON	ON* ON* ON*	K15△ K16△ K19△	K915△ K916△ K919△	K315 △ K316 △ K319 △	E, F, K, L, M, N E, L, N E, L, N
		FOUR POLE					
	ON ON ON ON	OFF NONE NONE OFF	ON OFF ON NONE	8538K1 △ K9 △ K4 △ K6 △	8538K91 △ K99 △ K94 △ K96 △	8538K31 △ K39 △ K34 △ K36 △	ALL D, F, G D, F, G E, F, K, M
8538	ON *ON NONE ON	NONE OFF OFF NONE	ON* ON* ON* OFF*	8538K5 △ K2 △ K7 △ K10△	8538K95 △ K92 △ K97 △ K910△	8538K35 △ K32 △ K37 △ K310 △	F E, L, N E
	OFF ON *ON ON	NONE OFF ON ON	ON* ON* NONE NONE	K11△ 8538K3 △ K12△ K13△	K911△ 8538K93 △ K912△ K913△	K311 △ 8538K33 △ K312 △ K313 △	E, F, K, L, M, N E E, F, K, M
Pag 10-10	ON ON *ON	ON ON ON	ON* ON*	8538K15 △ K16 △ K17 △	8538K915△ K916△ K917△	K315 △ K316 △ K317 △	ALL E, F, K, L, M, N E, L, N

* Momentary contact.

△ Complete part number requires this symbol to be replaced with a locking configuration letter - selected from page A16.

Example: 8536No. Basic Switch 8536K31E Locking Style Complete Part Number See Page A71 for circuit diagrams.


A14 SAFRAN ELECTRICAL & POWER



ECONOSWITCH - ENVIRONMENTALLY SEALED SWITCHES **Econoswitch Sealed Leverlock Toggle Switches**


Series - 8536, 8537, 8538

MOUNTING DIMENSIONS - ONE POLE / 8536

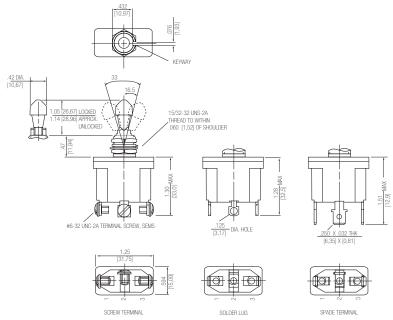

Terminal Identification

MOUNTING DIMENSIONS - TWO POLE / 8537

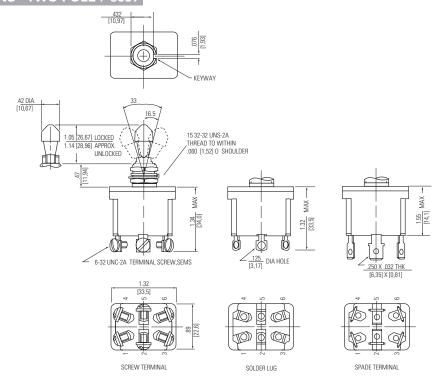

Terminal Identification

STANDARD 0.00 = inches[0,0] = mm

Mounting dimensions for reference only.

Non-functional terminals not supplied.




ECONOSWITCH - ENVIRONMENTALLY SEALED SWITCHES

Series - 8536, 8537, 8538

Econoswitch Sealed Leverlock Toggle Switches

MOUNTING DIMENSIONS - FOUR POLE / 8538

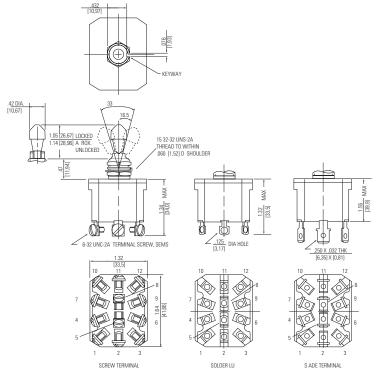


Terminal Identification

Non-functional terminals not supplied.


OPTIONS/ACCESSORIES

- Special mounting hardware
- Mounting hardware furnished assembled
- Terminal screws furnished assembled
- Special circuits
- Panel seals, Part Number 32-341

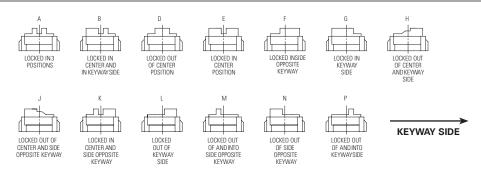

Figures A thru P do not represent details of construction. They schematically illustrate locking function.

PANEL CUTOUT DIMENSIONS



 $\frac{\text{STANDARD}}{0.00 = \text{inches}}$ $\frac{[0,0] = \text{mm}}{}$

Mounting dimensions for reference only.

A16 SAFRAN ELECTRICAL & POWER

